

COMPOSITE SHINGLE

By

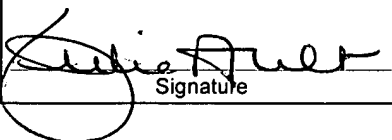
Randal J. Jolitz

CERTIFICATE OF EXPRESS MAIL

NUMBER EL 521288453 US

DATE OF DEPOSIT May 25, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to:
Commissioner for Patents, Washington, D.C. 20231.


Signature

0965403-052501

Although these composite shingles are capable roofing systems, there are some problems. For instance, the large amount of filler causes the product to be excessively heavy while the low amount of polymer reduces flexibility and increases the possibility of cracking and splitting. Accordingly, a need exists to improve composite shingles.

SUMMARY OF THE INVENTION

The present invention comprises a composite roofing shingle composed primarily of a mixture of a polyolefin based polymer composition and a filler. The blend includes 70 – 35% polymer and 30 – 65% filler. The preferred mineral is crushed limestone and the preferred polymer is polyethylene. The shingles may be molded to simulate the appearance of traditional roofing or any other configuration that may be advantageous for a particular roofing application.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is an isometric environmental view of the preferred roofing material as assembled on a roof.

Figure 2 is an isometric view of a preferred single piece of roofing material.

DESCRIPTION OF PREFERRED EMBODIMENT

The preferred roofing system is shown in Figures 1 and 2. The preferred shingles are composed of a mixture including a polymer and an inorganic. Colorants and other additives may be used to improve or alter the aesthetics or performance of the shingles. Nevertheless, the preferred composition includes a polyolefin and an inorganic filler.

X
The polymer component is a polyolefin such as polyethelene, polypropelene or mixture of polyolefin polymers. Preferably, this component is polyethelene. The preferred range of this component is 35 to 70% of the composition by weight.

Sub C1
The filler material may include any number or combinations of materials. The preferred filler is an inorganic material such as sand, talc, mica, slate, shale, limestone or fly, volcanic or bottom ash. The preferred filler is crushed limestone. Use of various materials can affect the resulting color of the shingle so selection of the filler can reduce the need for a colorant

The preferred composition includes a mixture of between 35 to 65% of the polymer component and 35-65% filler component. That mixture provides a lower weight and / or more flexible composite shingle. The preferred composition includes 60% crushed limestone and 40% polyethylene by weight.

The preferred roofing material is made by blending crushed limestone with polyethylene beads or pellets. The mixture is first fed into a mixer, preferably a kinetic mixer. The mixer not only blends the materials but also heats the material to a preferred state where the plastic encapsulates the filler. Color or other additives may be added at this stage. Once the material is mixed, it is conveyed to a piston type extruder and extruded out in shots. A typical shot will weigh between 30 and 35 pounds.

The blend is extruded onto the bottom platen of a mold. Once the material fills the bottom platen of the mold, the top platen of the mold is closed. Pressure is then applied to the top platen to compress the material to fill the entire mold. The preferred mold will be configured to have the shape of wood shakes, or the surface of slate. The

preferred mold is approximately 16 feet by 12 inches. The material is cooled to form a board. That board is then cut to length and bundled in different sizes to be shipped.

The shape including the width, thickness contour and length of the shingle may be altered depending on the application. The preferred shingle shown in Fig. 1 will be .25 inches thick, 5 inches wide and 12 inches long, where one side is molded to simulate shake or slate. Color may be added to the mixture during processing or added later.

0985403 062301
T05250" E0453860